


433MHz Wireless RFID Access Control Reader




WR1-B

Features

- > 433MHz Rolling Code technology
- > Card type: 13.56MHz Mifare card
- > Programmable Wiegand output of the
- > Receiver: 26 bits or 34 bits
- > Communication distance: 30m maximum
- > Ultra-low power consumption
- > Waterproof conforms to IP65

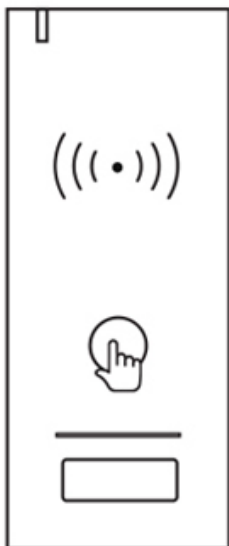


Wireless Reader

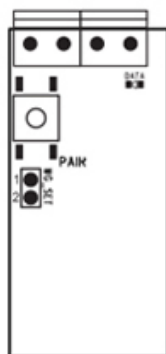

Receiver




Self Tapping Screws:
Φ 4*25mm



Wall Anchors



Screw Driver



3M Sticker

The wireless Reader Kit includes a Wireless Reader and a Receiver.

433MHz Rolling Code of encryption algorithm guarantees higher-secure, programmable Wiegand output of the Receiver makes it can work with most Wiegand controller in the world.


Super-strong 3M stickers provide a simple way of installing the Wireless Reader.

Because of ultra-low power consumption, the battery of Wireless Reader can work as long as 6 months.(bases on 30 times/day)

Specifications

Wireless Reader		Receiver	
Card Type	13.56MHz Mifare card	Operating Voltage	12V DC
Operating Voltage	3 units of AAA batteries	Working Current	<=15mA
Idle Current	<=5uA	Communication Frequency	433MHz
Working Current	<=35mA	Wiegand Output Format	26 bits Or 34 bits (Default is 26 bits)
Reading Distance	<=3cm	Operating Temperature	-20°C ~ +60°C (-4°F ~ +140°F)
Communication Frequency	433MHz	Operating Humidity	0% ~ 86%
Communication Distance	30m Maximum	Dimensions	L25 * W50(mm)
Operating Temperature	-20°C ~ +60°C (-4°F ~ +140°F)	Net Weight	10g
Operating Humidity	0% ~ 86%		
Index of Protection	IP65		
Colour	Black, White optional		
Dimensions	L120 * W50 * H20(mm)		
Net Weight	88g		

Dimensions

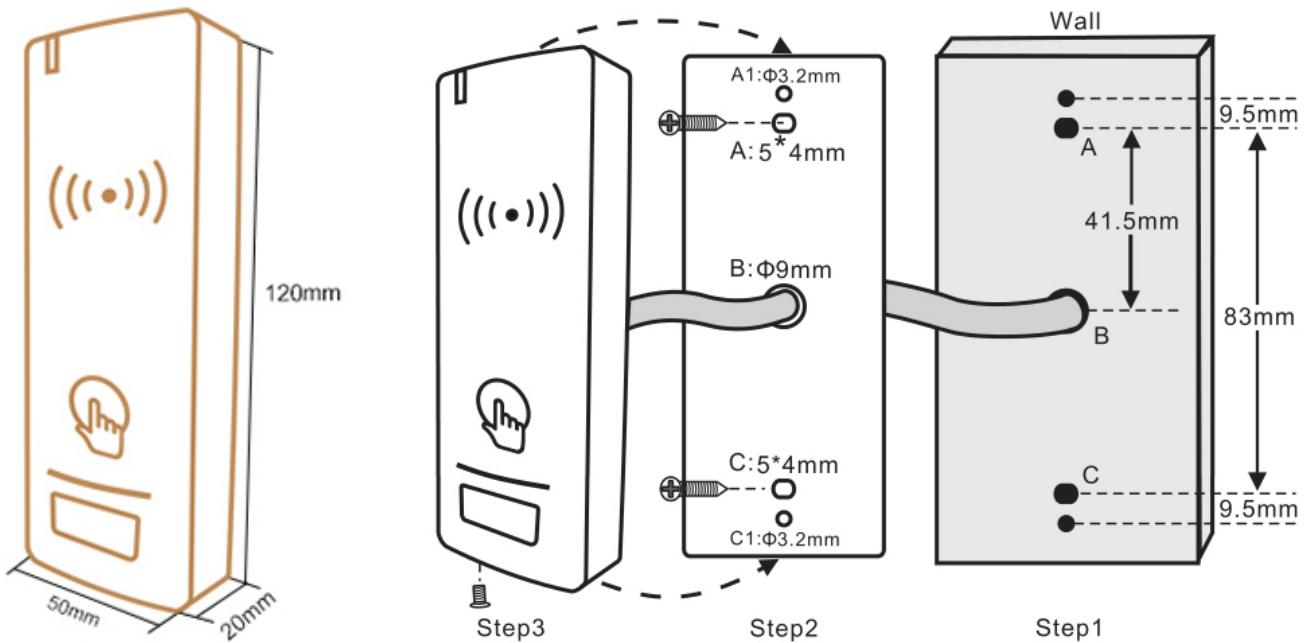

S4A Industrial Co., Limited

Address: The 2nd floor, Jinmin'an Industrial Zone, #529, Bulong Rd.
Bantian St. Longgang Dist. Shenzhen, PRC.. CN 518131



Tel: +86 755 29450011

www.s4a-access.com