





Special features

- Resettable design, EB-20G obvious indicators around the edges of the unit.
 - Press the pressing plate to enable the output function.
 - Pressing plate with status (green and red) shown.
 - Reversionary key with non-slip design.
 - Built-in buzzer status.
- Input power range from DC12-24V to connect with all types of fire alarm system.
 - Easy to assemble, outer case without screws, 3 set of output points to connect other equipment, embedded or surface installations to select. (Note: EB-20G only has output point function.)

Specification

EB-20G	LED/Buzzer	Without LED
Power Supply	DC 12V ~ DC24V $\pm 5\%$	×
Operation current	DC 12V : 18mA(standby)/75mA(operation) $\pm 5\%$ DC 24V : 11mA(standby)/41mA(operation) $\pm 5\%$	×
Buzzer	Set as silent, interval buzzing or continuous buzzing.	×
Indicator	Dual-color (red and green) . Red indicator to set blinking , off or on.	×
Output	N.O. · N.C.& COM. Output (Maximum load of 125V/3A)	
Material	ABS · PC	
Dimensions	90L × 93W × 45H (mm)	
Weight	208g (included wrapping)	192g


Status

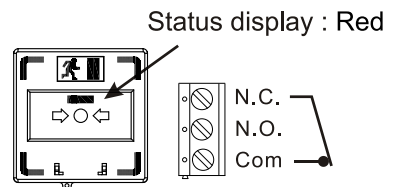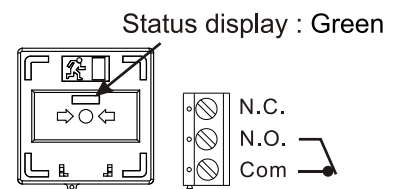

Installation

Embedded Installation

Lateral view

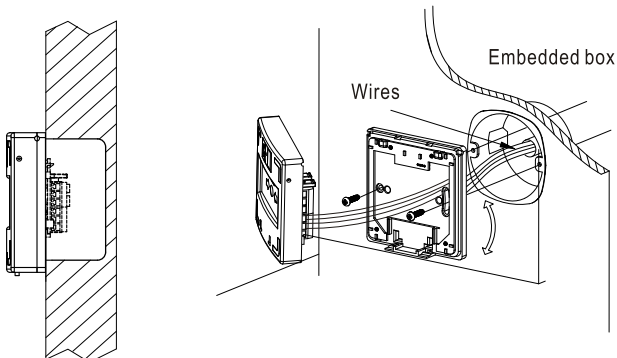

Surface Installation

