




Waterproof Standalone Access Controller

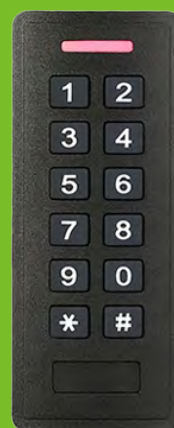

SK2

Introduction

Waterproof, conforms to IP66

Wiegand 26~37 bits input & output

User data can be transferred by Wiegand line

Access modes: Card, PIN, Card + PIN, Multi Cards/PINs

Card type: 125KHz EM card, 125KHz HID card, and 13.56Mhz Mifare Card

SK2 (EM) - One relay, 1000 users

SK2 (EM+HID) - One relay, 1000 users

SK2-X (EM+HID+Mifare) - One relay, 600 users

Specifications

Card Type	600 or 1000
User Capacity	EM, EM+HID, EM+HID+Mifare
Operating Voltage	DC12V
Waterproof	IP66
Read Range	2~6cm
Wiegand Interface	Wiegand 26~37bits
Physical	ABS Shell
Dimension	122 x 50 x 21mm

Dimensions(mm)

